



Easy Maintenance and Repairing

- All function keys are on one surface

Stronger Frame

- Welded only with two frame tubes, less weld more durability


Easier Battery Maintenance

- Battery is stationed in the upper part of frame,no need to crouch to reach battery

Specification

Model	LB2500		LB3300		LB5000E		LB6000E		LB7000E	
	Generator									
Starting System	Recoil/Electrical Starting									
Alternator Material	100% Cu									
Frequency (HZ)	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
Voltage(V)	230	120(120/240)	230	120(120/240)	230	120(120/240)	230	120(120/240)	230	120(120/240)
Rated Output (KW)	2	2	2.8	3	4	4.5	5	5.5	6	6.5
Max Output(KW)	2.2	2.2	3	3.3	4.5	5	5.5	6	6.5	7
THD(%)	≤20		≤20		≤25		≤25		≤25	
Running Time At 50% loading(H)	11	11	9.5	8.5	8	7.5	9	8.5	8	7.5
Fuel Tank Size (L)	11		11		11		21		21	
Noise dB(A)	96		96		97		97		97	
Insulation Grade	F		F		F		F		F	
	Engine									
Model	170F		170F		190FE		190FE		190FE	
Engine Type	OHV, Air Cooling, 4 Stroke									
Displacement (cc)	208		208		420		420		420	
	Packing Details									
Outside Packing Dimensions (mm) (L xW x H)	665x450x475		665x450x475		715x545x605		715x545x605		715x545x605	
20FT Loading Qty	215pcs		215pcs		102pcs		102pcs		102pcs	
40FT Loading Qty	440pcs		440pcs		198pcs		198pcs		198pcs	
40HQ Loading Qty	440pcs		440pcs		264pcs		264pcs		264pcs	
Net Weight (kg)	39		46		82		83		83	
Certifications	CE+EC	/	CE+EC	/	CE+EC	/	CE+EC	/	CE+EC	/

Materials Table

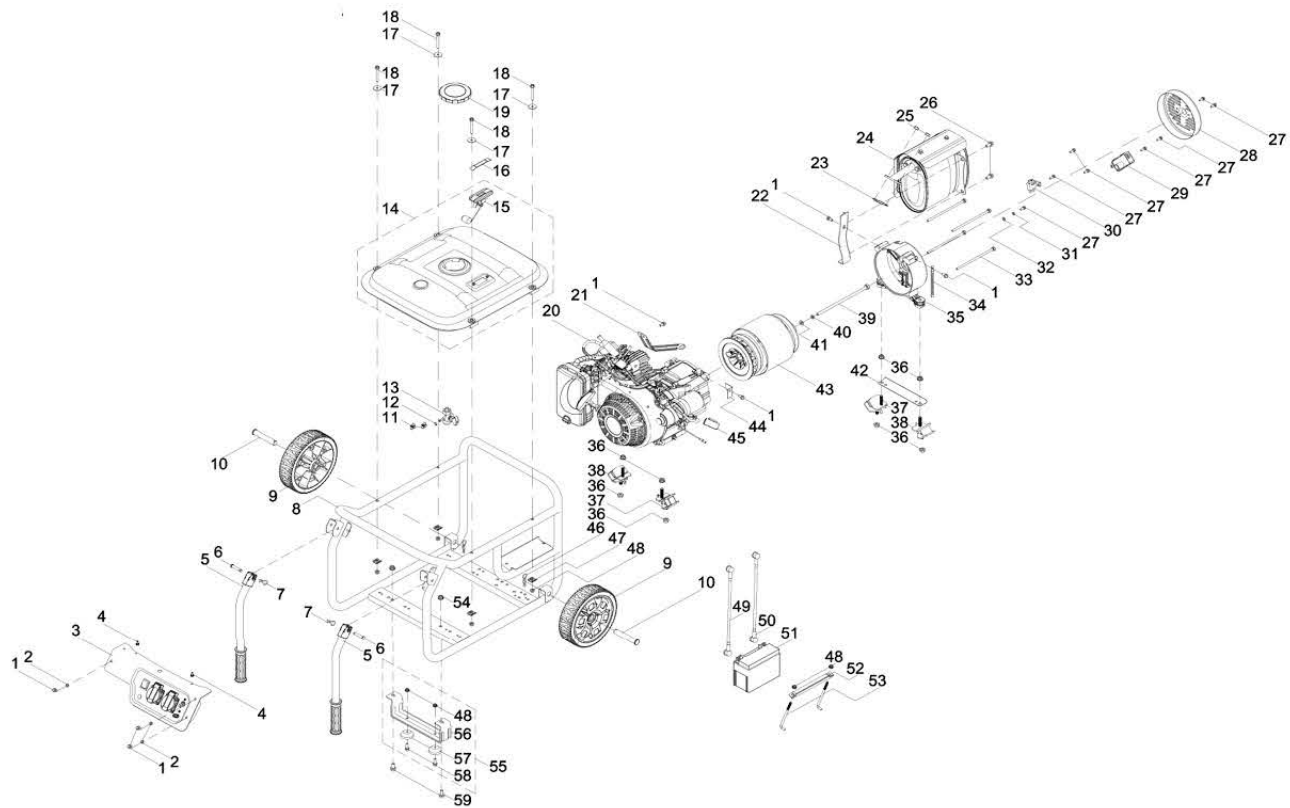

No.	Part	Specification	Quantities	Piece(S)
1	Bolt	GB5789 M6 x 12	7	PCS
2	Gasket, Drain Bolt	168FA	3	PCS
3	Nut,	GB6177.1 M6	1	PCS
4	Rubber Pad	LH3500E	2	PCS
5	Handle	LH3500E	2	PCS
6	Pin	GB882 φ 8 x 40	2	PCS
7	Circlip	ZS500	2	PCS
8	Frame Assembly	LH3500E	1	PCS
9	Tire		2	PCS
10	Pin	φ 16 x 85	2	PCS
11	Clip	1P70F	2	PCS
12	Clamp	168FA	1	PCS
13	Fuel Switch	QF2.0	1	PCS
14	Fuel Tank	LH3500E	1	PCS
15	Fuel Meter	LH3500E	1	PCS
16	Oil Sense Clip	QF2.0- II	1	PCS
17	Washer	φ 6.5 x 2 x φ 25	4	PCS
18	Bolt	GB5789 M6 x 45	4	PCS
19	Fuel Cap	QF5.0	1	PCS
20	Engine		1	PCS
21	Air Filter Bracket	QF2.0- II	1	PCS
22	Muffler Support	QF2.0	1	PCS
23	Gasket, Muffler	168FA	1	PCS
24	Muffler	PB2500	1	PCS
25	Nut	GB6170 M8	2	PCS
26	Bolt	GB5787 M8 x 16	2	PCS
27	Bolt	GB5789 M5 x 14	8	PCS
28	End Cover	QF2.0	1	PCS
29	Voltage Regulator	QF2.0	1	PCS
30	Brush	QF2.0	1	PCS

No.	Part	Specification	Quantities	Piece(S)
31	Washer	GB93 φ 6	1	PCS
32	Washer	GB97.2 φ 6	1	PCS
33	Bolt	GB5789 M6 x 155	4	PCS
34	Clip	B	1	PCS
35	Rear Bracket	QF2.0	1	PCS
36	Nut	GB6177.1 M8	8	PCS
37	Damping Pad	QF2.0 NR	2	PCS
38	Damping Pad	QF2.0 NR	2	PCS
39	Bolt,	GB5789 M8 x 1 x 210	1	PCS
40	Washer	GB93 φ 8	1	PCS
41	Washer	GB97.2 φ 8	1	PCS
42	Washer	GB93 φ 8	1	PCS
43	Washer	GB97.2 φ 8	1	PCS
44	Support Block	QF2.0	1	PCS
45	Clip		1	PCS
46	Circlip	ZS500	2	PCS
47	Washer		4	PCS
48	Nut	GB6177.1 M6	8	PCS
49	Anode Wire		1	PCS
50	Cathode Wire		1	PCS
51	Battery		1	PCS
52	Binder Plate	X-MAN3	1	PCS
53	Bolt	QF2.5-E	2	PCS
54	Nut	GB6177.1 M8	2	PCS
55	Support Base	KB2500E	1	PCS
56	Support Base	QF2.5- III ED	1	PCS
57	Damping Pad	QF3.0	2	PCS
58	Bolt	GB5789 M6 x 18	2	PCS
59	Bolt	GB5789 M8 x 16	2	PCS